




2" Clamped Butterfly Valve - left hand operated with TIR and padlock facility to handle. Contact parts manufactured in 316 stainless steel with PTFE main seal.

Options - Alternative seal materials. Alloy C276 version. 904L version. Available with pneumatic actuation. A range of 3" and 4" clamped valves is available.

Fitting Details

Part Number : 355/7000

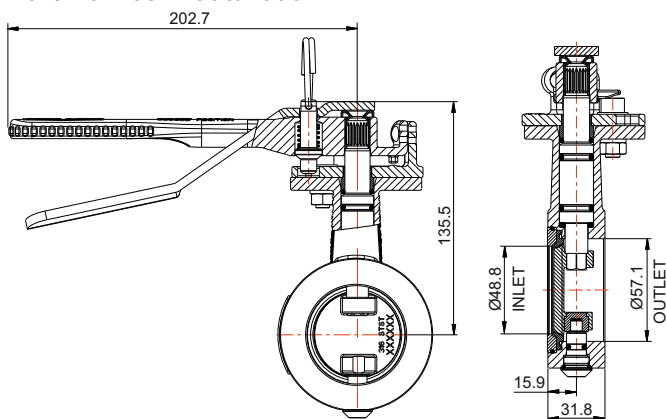

Specification

Weight	2.18 Kgs
Design Pressure (MAWP)	6 Bar (87 PSI)
Test Pressure	10 Bar (145 PSI)
Design Temperature	-40°C to 200°C (-40°F to 392°F)


Approved to BS EN14432.

Associated Parts

Associated Parts	Part No.
CNAF/PTFE inlet gasket *Note	5005-724
CNAF/PTFE outlet gasket *Note	6005-610

Note: Gasket drilling 4 x 18mm holes on a 125mm PCD.

Parts drawing

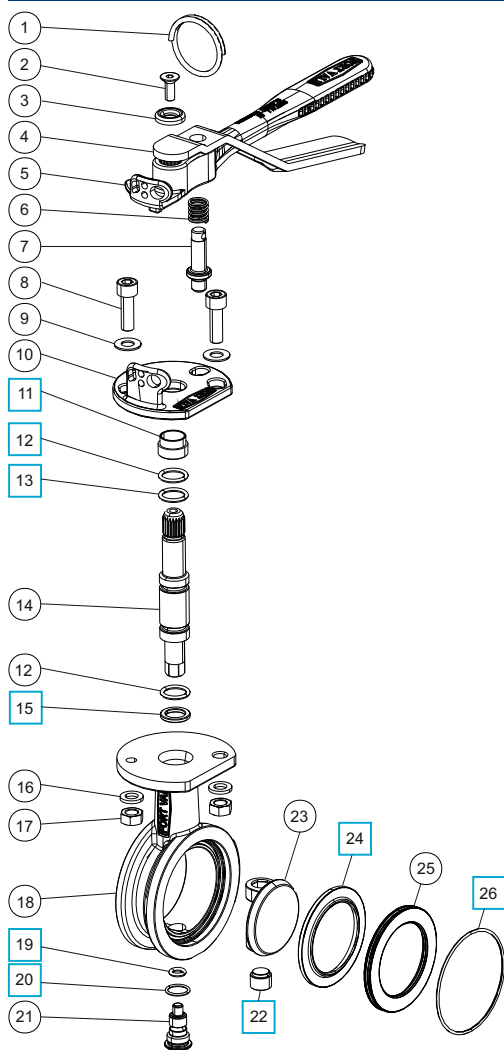

Item	Description	Part No.
1	Split ring	368/0011
2	M6 countersunk bolt	5111-030
3	Washer	20370
4	Operating lever	368/9837
5	Handle	368/0050
6	Handle location spring	368/0012
7	Handle location pin	368/0010
8	Sockethead cap screw (2)	5111-148
9	Plain washer (2)	5113-005
10	Stuffing clamp	368/0040
11	PTFE stuffing clamp bush	368/0301 ☐
12	PTFE O ring (2)	20363 ☐
13	Viton O ring	20361 ☐
14	Spindle	355/5020
15	PTFE spindle seat	355/5009 ☐
16	Spring washer (2)	5113-003
17	Full nut (2)	5112-001
18	Body	355/7010
19	PTFE O ring	5005-541 ☐
20	PTFE O ring	5005-048 ☐
21	Bottom spindle	355/5005
22	PTFE lower bush	355/5007 ☐
23	Closure plate	355/5030
24	PTFE main seal	355/0202 ☐
25	Seal clamp plate	355/0201
26	EPDM O ring	5005-476 ☐

SEAL KIT

Part number **355/70SK** contains all parts marked ☐