

2" Flanged Airline Butterfly Valve - inlet flange slotted to suit 2" BSTD minimum. 4 hole tank connection to DIN50 PN10. Complete with 1/4" BSP pressure gauge connection, gauge guard and TIR facility to handle. Contact parts manufactured in 316 stainless steel with PTFE seals.

Optional extras - gauze filter or sintered filter. TIR wire welded to gauge inlet plug.

Specification

Weight	5.9 Kg
Design Pressure (MAWP)	6.9 Bar (100 PSIG)
Test Pressure	12.5 Bar (181 PSIG)
Design Temperature Range	-40°C to 190°C (-40°F to 374°F)

Approved to BS EN14432

Range

Description	Part No.
Standard valve – no gauze/filter	535/3000
Valve with gauze filter	535/3000F
Valve with sintered filter	535/3000S
Valve with TIR wire to gauge inlet plug	535/3000W


Associated Parts

Associated Parts	Part No.
Blind Flange	370/4239CM
Inlet Gasket	5005-360
Bolting Kit	311/3000
Pressure gauge	920/07BBSP
Gauge Adaptor	352/4004
Stud Kit	311/3700
Outlet Gasket	5005-361
Tank Pad	355/3100

Fitting Details

Example shown : 535/3000 fitted with pressure gauge.

GAUZE FILTER WITH SNAP RING & SPACER (SEE SUFFIX F)
SINTERED FILTERS WITH SNAP RING & SPACER (SEE SUFFIX S)

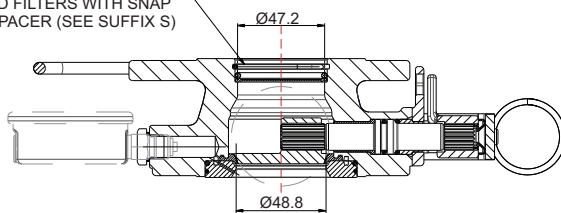

TIR WIRE POSITION (SEE SUFFIX W)

