



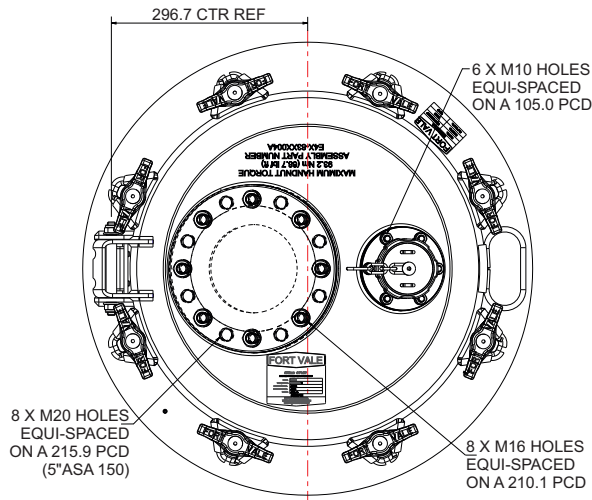

6 point example shown for illustration purposes only

Fitting Details

Example shown : E4X-83XX004A

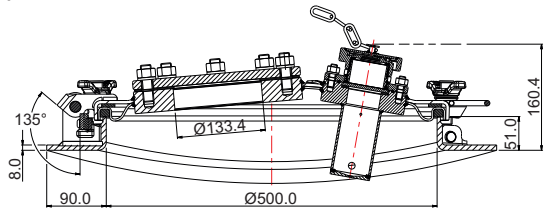

500mm Manlid Assembly - for Hydrogen Peroxide tank specification. 8 point fastening. Manlid cover fitted with a dual drilled filling port and a 50mm breather vent. 8mm thick neck/compensating ring profiled to suit tank radius. Contact parts manufactured in 316 stainless steel. Stainless steel swingbolts with stainless steel handnuts. Seal supplied separately.

Options - Tank radius range from 850mm to 1220mm. Alternative handnuts available. 135° and 120° opening.


Specification

Weight	58.28 Kg *Note
Design Pressure (MAWP)	4 Bar (58 PSIG)
Service Test Pressure	6 Bar (87 PSIG)
Design Temperature	-40°C to 200°C (-40°F to 392°F)

***Note:** Weight may vary according to specification

Approved to BS EN14025

Parts drawing

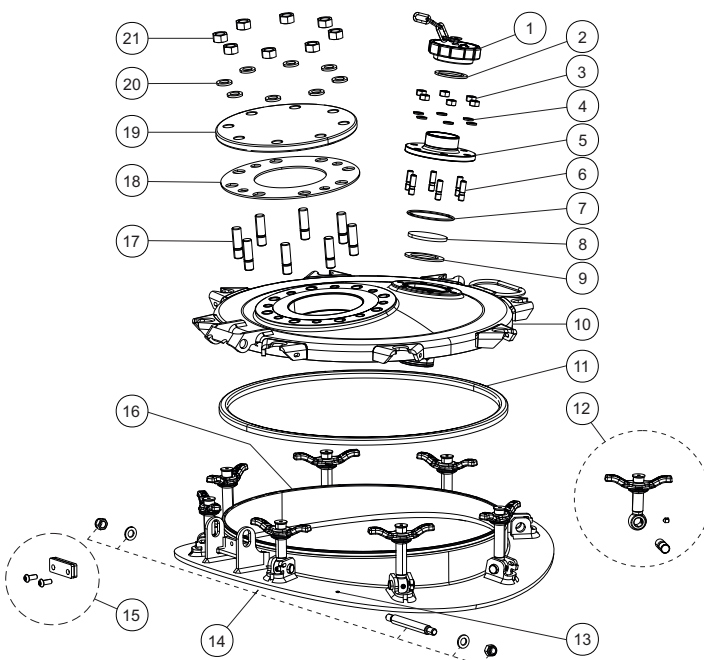

Item	Description	Part No.
1	Breather cap assembly	674/3040
2	Breather cap seal	5005-414
3	M10 full nut (6)	5112-002
4	M10 spring washer (6)	5113-002
5	2" BSP outlet	674/3546
6	M10 stud (6)	371/0001
7	PTFE O ring	5005-235
8	Sintered disc	865/2000
9	PTFE breather disc seal	5005-435
10	Manlid cover	74E/0550
11	Seal – supplied separately *Note	5005-50XXX
12	Swingbolt assembly - 4x short 4x long *Note	496/5342 496/5XXX
13	M6 grub screw	5111-009
14	Hinge pin assembly	600/1060
15	Hinge kit *Note	135A
16	Neckring *Note	6EP/6398XXXPR
17	M16 stud (8)	535/1301
18	PTFE fill flange gasket	5005-411
19	Blind flange	674/5051
20	M16 spring washer (8)	5113-012
21	M16 full nut (8)	5112-003

***Note** Part number varies according to specification