




2" BSP Uniact Relief Valve - 2" BSP male connection. Suitable for a vacuum setting of between 0.5" - 29" Hg (0.02 - 0.98 bar) or a pressure setting of between 1 - 60 PSI (0.07 - 4.14 bar). Single acting valve. Contact parts manufactured in 316 stainless steel fitted with Fortyt seal as standard. Complete with PTFE tank seal.

**Options** - pressure only or vacuum only. Alternative connections: 1½" BSP, 65mm DIN11851. Stainless steel cap with/without gauze. A range of alternative seals is available.

**Fitting Details**

Example shown : 85/X00XXA

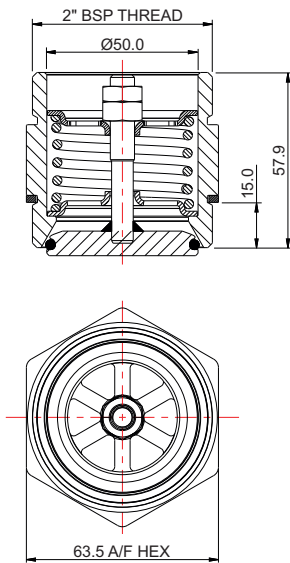

**Specification**

Weight (standard valve) 0.73 Kg  
 Fortyt seal temperature range -55°C to +200°C  
 Viton seal temperature range -20°C to +200°C

**i** Operating Instructions available - OPIN14


**Range**

Part No.	Description
85/XXXXXA	Standard 2" BSP Uniact Relief Valve
85M/XXXXXA	2" Uniact with 65mm DIN 11851 tank connection

**Associated Parts**

Part No.	Description
600/1017	2" Tank weld-in socket
176/2645	65mm DIN 11851 socket
176/2630	65mm DIN 11851 nut
10218GZ	Stainless steel gauzed cap
10218	Stainless steel cap – no gauze

**Parts drawing**

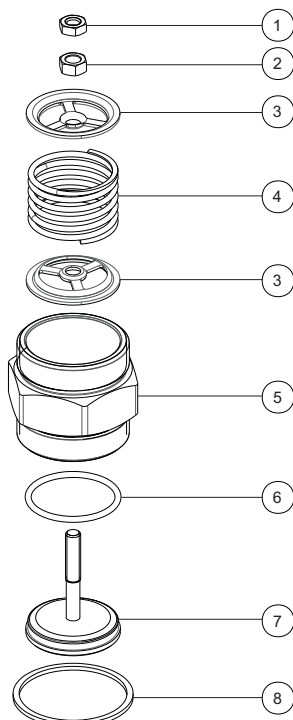

Item	Description	Part No.
1	M8 half nut	5112-004
2	M8 full nut	5112-001
3	Spring pad (2) *See Note	85/100X
4	Vacuum spring *See Note	5104-XXX
5	Body	85/1000
6	Fortyt main O ring	5005-118
7	Poppet	85/1015
8	PTFE tank seal	5005-575

Note : Part number varies according to specification.



**C SPANNER - PART NUMBER 400/3000**

For relief valve fitting and removal. Size range 1¼" to 3".

Visual inspection and service (where necessary) is recommended on a regular basis.

In-house test certificates confirming valve settings and serial numbers are supplied as standard.