



65mm NB Foodgrade Extended Body Relief Valve with 100mm DIN11851 connection - Designed and tested for incompressible fluid flow. Suitable for a pressure range of between 3 - 50 PSI (0.21 - 3.45 Bar) and a standard vacuum setting of 0.5"Hg (0.02 Bar). Contact parts manufactured in 316 stainless steel. Fitted with Forty and EPDM seals.

Options - Additional vacuum settings are available. Valve with 2½" BSP fitting available.


Specification

Weight 6.61 Kg *Varies
 Design Temperature Dependant upon seal material

Design approval by Lloyds Register of Shipping.

Tests may be witnessed and valves individually stamped by an independent inspectorate by arrangement.

Test certificates are supplied as standard.

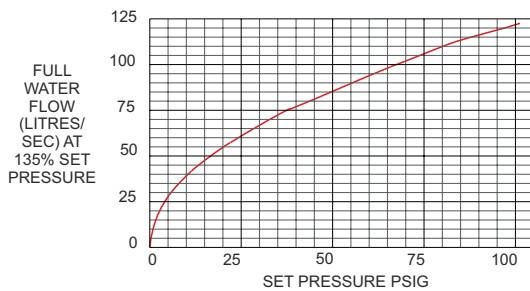

Range

Part No.	Description
0M/5XXXX	Foodgrade relief valve – 100mm DIN11851

Associated Parts

Part No.	Associated Parts
176/2600	100mm DIN11851 milk fitting nut
176/2620	100mm DIN11851 milk fitting socket
176/2900 *	Removable clamped gauze
920/07BBSP	0-100 PSIG pressure gauge, bottom entry, stainless steel internal parts
921/07BBSP	0-100 PSIG pressure gauge, bottom entry, brass internal parts
921/07RBSP	0-100 PSIG pressure gauge, rear entry, brass internal parts

* Fitting ancillary items in the flow stream will affect the valve flow rate.

Fitting Details

Example shown : 0M/5XXXX

