



Specification

Nominal size

40mm

Tank connection

Flanged: 4 x 18mm holes on a 125mm PCD

Outlet/process connection

Flanged: 4 x M16 tapped holes on a 125mm PCD

Options

Left or right hand operation

With handle or remote operation lever

Materials

Contact parts: PFA lined

Main seal: RTFE

Ball: Refer to the Ball Material Table below

External metal surfaces are painted with Epilife-2

Design Conditions

Weight:	6.3 Kg
Design Pressure (MAWP):	4 Bar
Test Pressure:	7.3 Bar
Design Temperature Min:	-40°C
Design Temperature Max:	200°C

NOTE: The Design Conditions and Section View dimensions are for the specified part number only.

Design Codes

BS EN 14432

Range


Description	Part No.
With handle, left hand	370/P680L/XX
With handle, right hand	370/P680R/XX
With remote lever, left hand	370/P68RL/XX
With remote lever, right hand	370/P68RR/XX

Note: The last two digits are related to the ball material.


Ball Material

Material	Part No.
PFA lined 316 stainless steel	370/P68XX/PA
Solid PVDF	370/P68XX/PV
Zirconia (ZRO2)	370/P68XX/C1
Aluminium oxide (Al2O3)	370/P68XX/C2
Silicone Nitride (Si3N4)	370/P68XX/C3
Nilcra® Zirconia MS grade	370/P68XX/C4


Section View: 370/P680X/XX

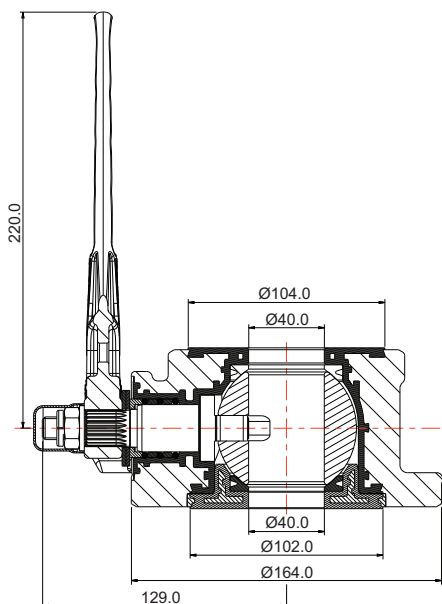

Section View: 370/P68RX/XX

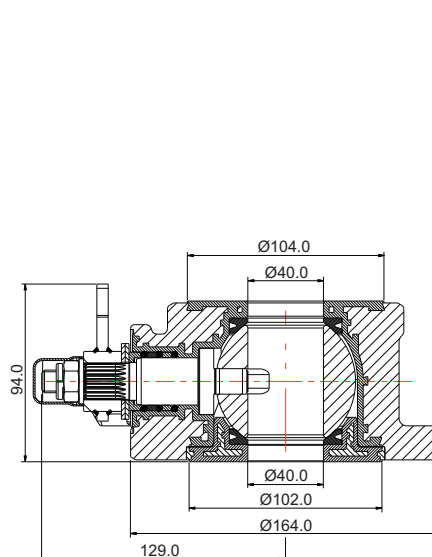

Parts Drawing

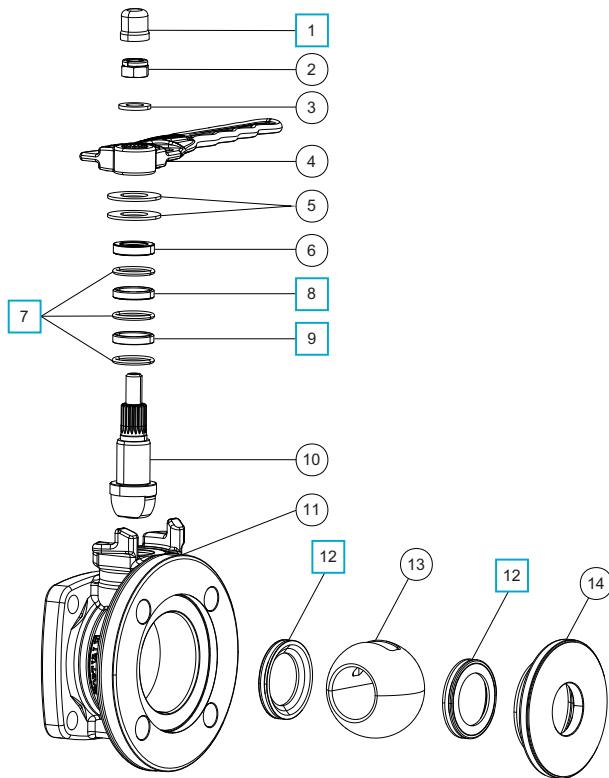

Parts List

Item	Description	Part No.	
1	LDPE cap	FA-01565	☐
2	M12 self locking nut	5112-007	
3	M12 washer	5123-003	
4	Handle	370/A0025	
5	Belleville washer (2)	5113-041	
6	Top stuffing collar	370/P514	
7	PTFE O ring (3)	5005-654	☐
8	Top stuffing collar	370/P512	☐
9	Bottom stuffing collar	370/P513	☐
10	PFA lined spindle	370/P606	
11	PFA lined body	370/P681	
12	RTFE seal (2)	370/P685	☐
13	40mm ball *Note	370/P688XX	
14	PFA lined seal clamp plate	370/P684	

NOTE: The material changes the part number. Refer to the Ball Material table on page 1 of 2.

Seal Kit

Description	Part No.
All parts marked ☐ in the Parts List	370/P68SK