


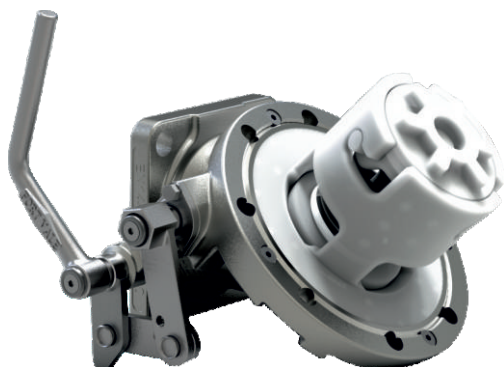

Specification

Nominal size/body angle

80mm / 45°

Inlet connection

Flanged: 8 x 14mm holes equi-spaced on a 178mm PCD

Outlet connection

Flanged: 4 x 17mm holes on a 160mm PCD

Materials

Contact parts: 316 stainless steel with PFA moulded lining

Main seal: Fortyt

Design Conditions

Weight:	11.9 Kg
Design Pressure (MAWP):	4 Bar
Test Pressure:	7.3 Bar
Design Temperature Min:	-40°C
Design Temperature Max:	200°C

NOTE: The Design Conditions and Section View dimensions are for the specified part number only.

Design Codes

BS EN 14433


Related Parts

Description	Part No.
Weld-in flange for lining	324/9000L
Stud kit	312/1177


GASKETS: Do not install an inlet gasket.

If you install a Fort Vale PFA lined ball valve or PFA lined butterfly valve to the outlet, do not install an intermediate gasket.

Section View

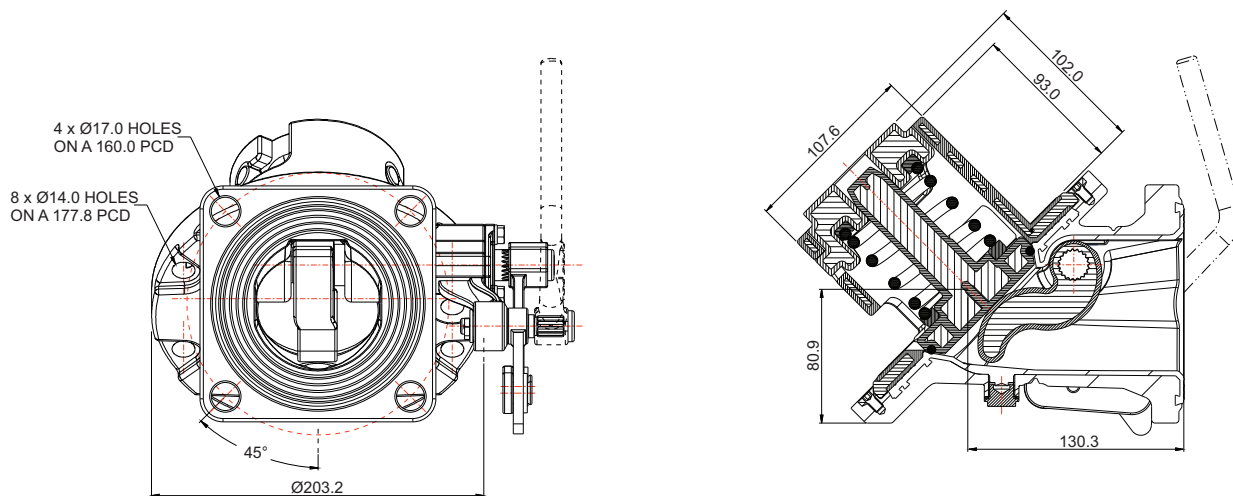

Parts Drawing

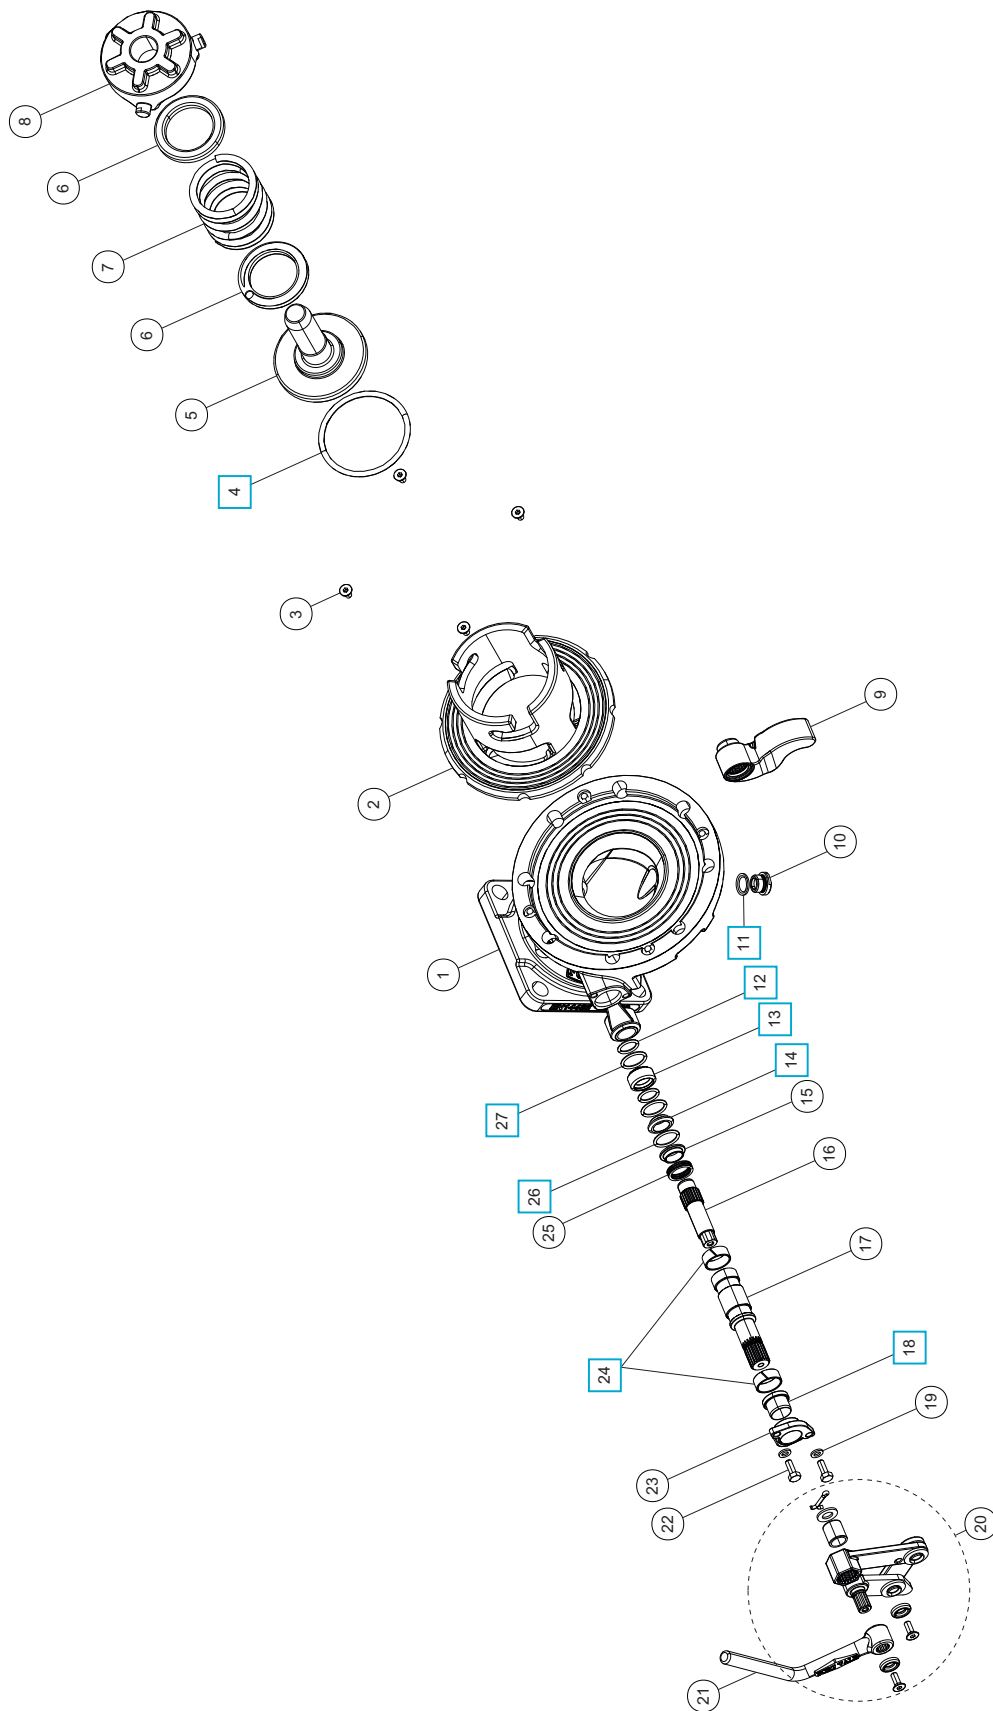

Parts List

Item	Description	Part No.
1	PFA lined body	870/P1370LM
2	PFA lined cage	870/P1371LM
3	6mm countersunk bolt (4)	5111-018
4	Fortyt O ring	ORB337F1 ☐
5	PFA lined poppet	870/P125LM
6	PTFE spring support plate (2)	870/1146
7	PFA lined spring	5104-865P
8	PFA lined spring retainer cap	870/P1374LM
9	PFA lined lifting fork	870/P124LM
10	M16 plug	870/P138
11	PTFE gasket	870/P139 ☐
12	Viton O ring (2)	5005-134V ☐
13	RTFE spindle bush	870/P127/1 ☐
14	RTFE spindle bush	870/P127/2 ☐
15	Spring housing bush	845/P127/4
16	Spindle section 2	870/P128
17	Spindle section 1	870/P129
18	PTFE spindle stuffing seal	845/0061 ☐
19	M6 spring washer (2)	5113-008
20	Handle linkage assembly	324/8910
21	Handle *Note	324/8670
22	M6 hex bolt (2)	5111-022
23	Stuffing clamp flange	870/P1376C
24	Split bearing (2)	874/0023 ☐
25	Spirawave spring	5104-027
26	Viton O ring	5005-336 ☐
27	Perfluoroelastomer O ring (2)	ORB117KD ☐

NOTE: The handle is sold separately. We recommend the handle shown, but other types are available.

Seal Kit

Description	Part No.
All parts marked ☐ in the Parts List	870/P12SK